



BAND SLICER HEAD (BF-15/ BF-15W/BF-25/BF-25W)

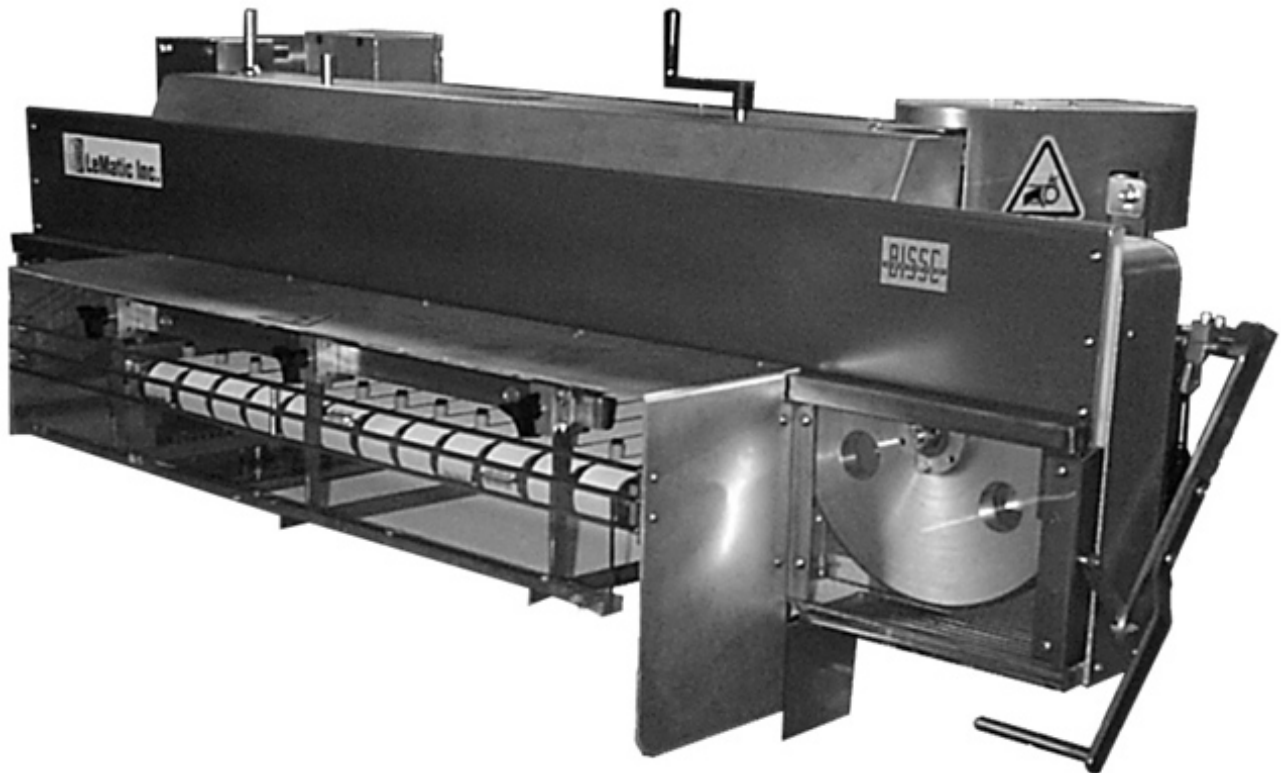


Features

- Single Through Slicing (BF-15 or BF-15W models)
- Single or Double Through Slicing (BF-25 or BF-25W models)
- Floating Head Pressure Design produces a consistent quality slice
- Completely adjustable for slicing height and top conveyor pressure
- Slicing head can be raised out of position to bypass unsliced products
- Slicer head can be mounted on existing LeMatic Conveyor frame or revised design for customer supplied frame
- Design emphasizes safety and reliability, straight forward operation and complete accessibility for maintenance and sanitation

BAND SLICER HEAD

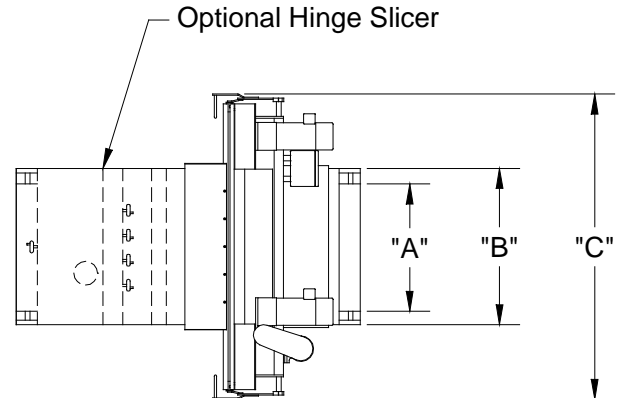

| Model | "A" Belt Width | | "B" Frame Width | | "C" Machine Width | |
|--------|----------------------|-------|-----------------------|--------|-------------------------|--------|
| | in. | [mm] | In. | [mm] | in. | [mm] |
| BF-15 | 26 | [660] | 34 ½ | [876] | 62 | [1575] |
| BF-15W | 34 | [863] | 42 ½ | [1079] | 70 | [1778] |
| BF-25 | 26 | [660] | 34 ½ | [876] | 81 | [2057] |
| BF-25W | 34 | [863] | 42 ½ | [1079] | 88 ½ | [2248] |

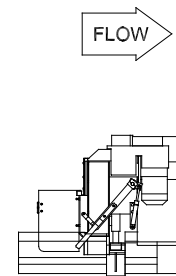

General Specifications

- Production Rate: Maximum of 800 Pcs./min.
- Electrical Controls: 208-230-460 Volt 60 Hz 3 Ph (Other Voltages Available)
- Control Voltage: 120VAC (Other Voltages Available)
- Air Requirements: None
- Slicer Head Drive: ¾ HP w/Brake (each blade drive)

Options

- Power Head Lift
- Slicer Head for a 26" or 34" wide belt conveyor
- Special Voltage
- Wash Down Construction
- Floating Top Conveyor (FTC) for special slicing requirements


LeMatic Inc.
Performance you can depend on...
Quality you can believe in.

2410 W. Main Street
 Jackson MI 49203 USA
 Phone (517) 787-3301
 Fax (517) 782-1033
www.lematic.com